


**Manufacturer** CREE  
**Model** LR6-DR1000  
**Description** Downlight Insert, 6", 120V  
**Driver** Internal  
**Nominal Power (W)** 11  
**Dimming Control** Line-voltage, forward- and reverse-phase, manufacture prefers forward-phase  
**Product Range**  
**Test Date** 9/2/2010

Dimmer Tested Against:	MDS8RW101	EDIMMOD	DRD4
Pass/Fail	Pass	Pass	Pass
Best-Fit Power Profile:			Fluorescent
Minimum ON	3	3	
Maximum ON	92	75	
Adjust	20	60	
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	100.0%	100.0%	100.0%
Minimum (Perceived)	45.6%	44.7%	58.8%
Minimum (Measured)	20.6%	19.9%	34.6%

Linearity Curves (Best-fit Power Profile Applied):

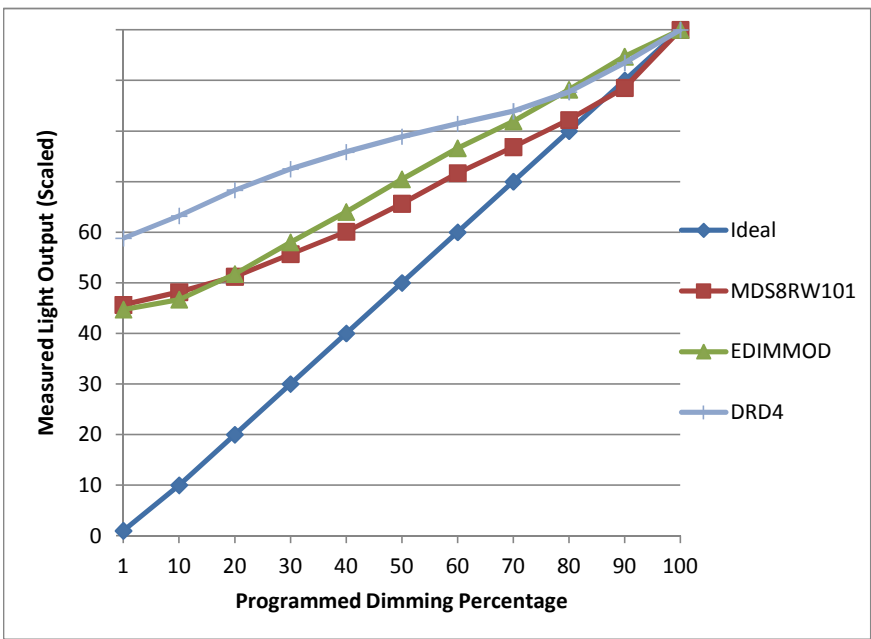

Observations: None