


Manufacturer American design
Model MR16 5W 12V DIM
Description MR16 lamp
Driver/Transformer 75VA magnetic transformer
Nominal Power (W) 5
Dimming Control Forward-phase
Product Range
Test Date 4/15/2015

Dimmer Tested Against:	SDM12-EM		
Pass/Fail	Pass		
Best-Fit Power Profile:			
Minimum ON	6		
Maximum ON	23		
Adjust	100		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived), 120V	95.1%		
Minimum (Perceived)	35.1%		
Minimum (Measured)	12.3%		

Linearity Curves (Best-fit Power Profile Applied):

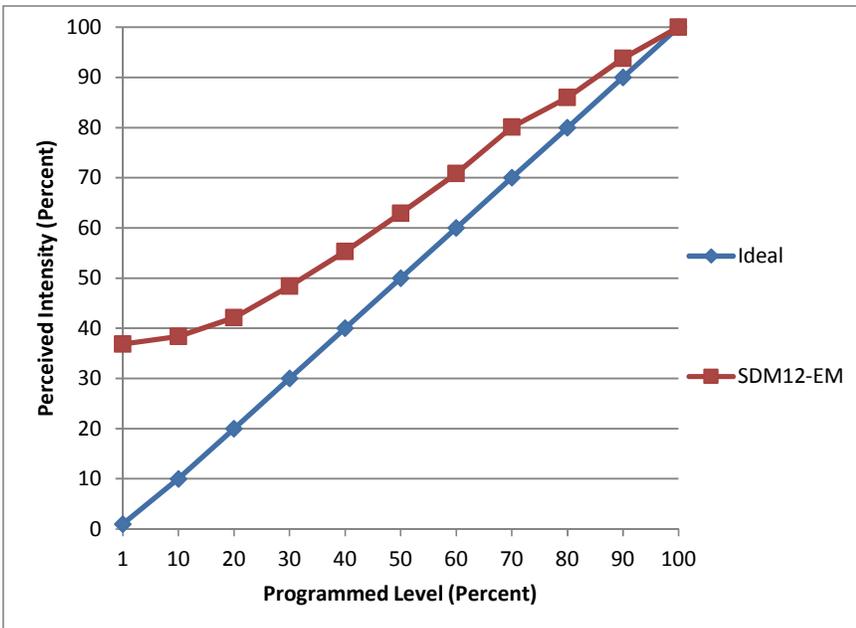

Observations:

Minimum of two fixtures per dimmer output.