


Manufacturer Aquarii
Model AX-150-30-80-60B4G-D-B-4-B
Description High-power LED downlight
Driver Qty 2: Inventronics EUV-096S048ST
Nominal Power (W) 150
Control Current 0.7mA
Dimming Control 0-10VDC
Product Range Axceleron
Test Date 9/10/2015

Dimmer Tested Against:	LVOS		
Pass/Fail	Pass		
Best-Fit Power Profile:			
Minimum ON	1.5		
Maximum ON	9.3		
Adjust	-20		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived)	95.7%		
Minimum (Perceived)	4.2%		
Minimum (Measured)	0.2%		

Linearity Curves (Best-fit Power Profile Applied):

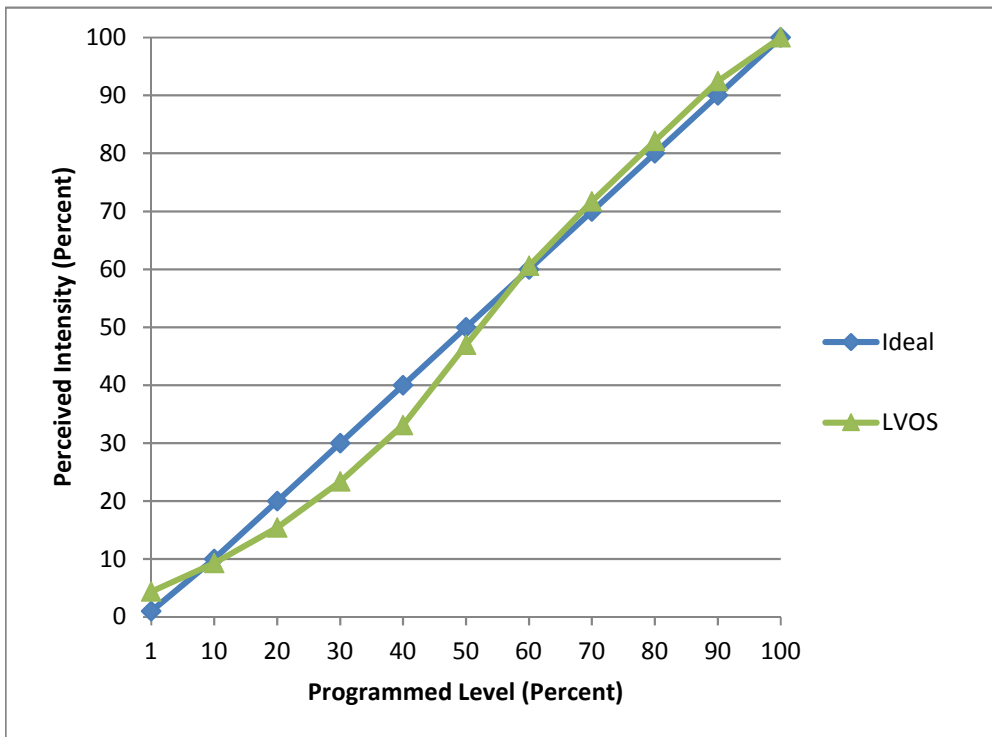

Observations:

7W measured when powered but commanded with 0-10V to 0, therefore it is recommended to pass power feed through relay to open when off.

