


Manufacturer EIKO
Model LED17WPAR38-NFL-840K-DIM-G4A
Description Par 38 Lamp
Driver Integrated
Nominal Power (W) 17
Dimming Control Forward and Reverse
Product Range -
Test Date 1/16/2017 1/16/2017 1/16/2017 1/13/2017

| Dimmer Tested Against: | SDM12-EM | Scenepoint | UDM-FWD | UDM-REV |
|--|----------|------------|---------|---------|
| Pass/Fail | Pass | Pass | Pass | Pass |
| Best-Fit Power Profile: | | | | |
| Minimum ON | 1 | 2 | 1 | 1 |
| Maximum ON | 93 | 94 | 93 | 91 |
| Adjust | 100 | 100 | 100 | 100 |
| Light Output Range (vs. non-dimmed) | | | | |
| Maximum (Perceived) | 95.4% | 95.3% | 95.1% | 95.1% |
| Minimum (Perceived) | 10.3% | 17.1% | 11.6% | 7.1% |
| Minimum (Measured) | 1.1% | 2.9% | 1.4% | 0.5% |

Linearity Curves (Best-fit Power Profile Applied):

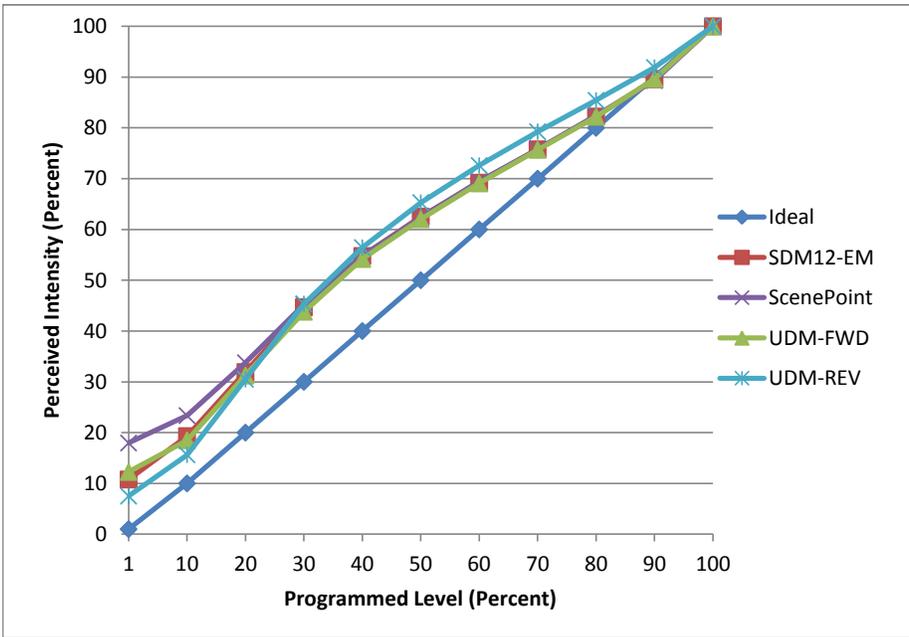

Observations:

bgk