


Manufacturer Soraa
Model VIVID 2 MR16
Description MR16 Lamp
Driver 75VA magnetic transformer
Nominal Power (W) 9.8
Dimming Control Forward-phase
Product Range
Test Date 4/15/2015

Dimmer Tested Against:	SDM12-EM		
Pass/Fail	Pass		
Best-Fit Power Profile:			
Minimum ON	3		
Maximum ON	80		
Adjust	100		
Light Output Range (vs. non-dimmed)			
Maximum (Perceived), 120V	95.2%		
Minimum (Perceived)	18.5%		
Minimum (Measured)	3.4%		

Linearity Curves (Best-fit Power Profile Applied):

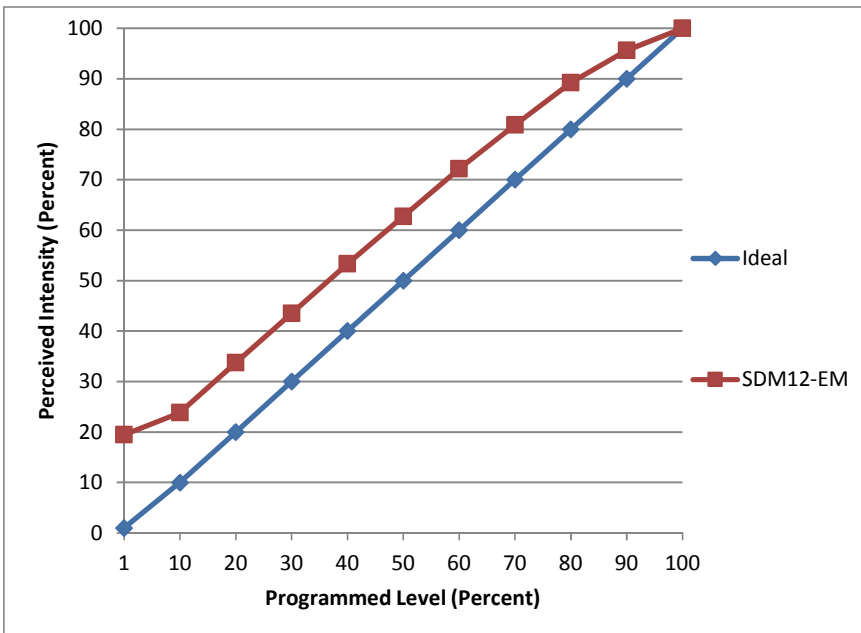

Observations: